

Pressure transmitter COMPACT

for diaphragm seal operation, robust
Type series CC60



Application area

- Chemical industry
- Petrochemical industry

Features

- Measuring ranges 0...250 mbar up to 0...400 bar
- Linearity error including hysteresis $\leq 0.2\%$ f.s.
- Piezoresistive measuring system
- Separating foil from stainless steel or special materials
- Completely encapsulated electronics
- Stainless steel housing as standard or field housing
- Degree of protection IP 65, IP 67 option
- Various output signals
- Process temperature up to 200 °C

Options

- Labom REconnect quick coupling device for easy and safe diaphragm seal systems, Type series MK1000, see data sheet D6-022
- Explosion protection for gases
- Classification per SIL 2
- As per UKCA regulations
- Inspection certificate: material certificate as per EN 10204-3.1

Application

The pressure transmitter COMPACT acts as a highly accurate converter of pressure measurements to load-independent current signals. Because of various variants of process connections and materials these transmitters are especially suited for pressure measurement with aggressive, highly viscous, solidifying or crystallizing media. The completely welded stainless steel housing can be designed up to protection type IP 67. The use of temperature decouplers means that the COMPACT pressure transmitter can be used for process temperatures up to 200 °C.

Technical Data

Case design

Designs

- field housing IP 65 or IP 67, with cable gland
 - right-angle plug per DIN EN 175301-803-A (DIN 43650 Form A), IP 65
 - cable connection, IP 67
 - circular connector M12, IP 65
- case material stainless steel
union nut: polyamide (with plug connector or cable connection for electr. connection)
electronics encapsulated with silicone.
Inner chamber aeration for measuring ranges < 16 bar over case thread or connection cable (depending on design)

Process connection

see page 3 and order code for variants
material-Nr.: 1.4404 (316L) for the sleeves

Temperature ranges

ambient temperature range: -25...+70 °C
option: -40...85 °C

storage temperature range: -10...+90 °C

process temperature: see order details

Measuring ranges/overrange limits

see order details

intermediate measuring ranges upon request

Response time

≤ 20 ms

Measuring accuracy

linearity error incl. hysteresis:

≤ 0.2 % f.s.

≤ 0.3 % f.s. for measuring ranges ≤ 0...60 bar

fixed-point adjustment accuracy of

adjustment:

<± 0.2 % f.s.

Temperature effect

a) case

in compensated temperature range

0...50 °C:

- zero point ≤ 0.2 %/10 K

- span ≤ 0.2 %/10 K

in compensated temperature range

-40...0 °C and 50...85 °C

- typical 0.3 %/10 K

- max. 0.3 %/10 K

b) process connection (diaphragm seal) depending on design

flat diaphragm seal zero error

DN 25/1" 4.8 mbar/10 K

DN 32/1 1/2" 2.3 mbar/10 K

DN 40 1.6 mbar/10 K

DN 50/2" 0.6 mbar/10 K

inline diaphragm seal zero error

DN 25/1" 9.5 mbar/10 K

DN 32/1 1/2" 4.1 mbar/10 K

DN 40 3.9 mbar/10 K

DN 50/2" 3.9 mbar/10 K

The specified zero error for the process connection is a guide value for a standard design. We can provide a detailed system calculation upon request. Systems with reduced diaphragm seal errors are also available.

Auxiliary energy supply

standard design:

· nominal voltage 24 V DC

· function range 6...30 V DC

· max. allowable operating voltage 30 V DC

Supply voltage influence

≤ 0.01 % f.s. / V

Output signal

4...20 mA, 2-wire technology

0...20 mA, 3-wire technology

4...20 mA, 3-wire technology

0...10 V, 3-wire technology

Current limitation in output signal

max. output current approx. 30 mA

Adjusting range

approx. ± 5 % f.s.; zero point and measuring span separately adjustable

Burden

2-wire circuitry

standard design $R_a = \frac{U_B - 6 V}{20 \text{ mA}}$ (KOhm)

U_B = operating voltage

R_a = max. permissible burden resistance (incl. lead)

Functional safety

EN 61508, classification per SIL 2,

TÜV-Reg.-No. 44 799 13190204

Burden influence

for 500 ohm burden change: ≤ 0.1 % f.s.

Ex-approval

ATEX:

TÜV 00 ATEX 1557 X

marking:

 II 2 G EEx ib IIC T6

· U_{max} ≤ 30 V DC

· I_{max} ≤ 150 mA

· P_{max} ≤ 1 W

· C_i ≤ 49 nF

· L_i ≤ 33 µH

Further technical data see Ex-instruction XA_006.

Weights (without diaphragm seal)

· field housing: approx. 460 g

· case with connector: approx. 200 g

Installation position

any


EMC test

· noise immunity according to EN 50082 section 2, version March 1995 issue for industry


· emitted interference according to EN 50081 section 1, 1993 issue for residential and industrial areas

Device emits no radiation of its own


Dimensions

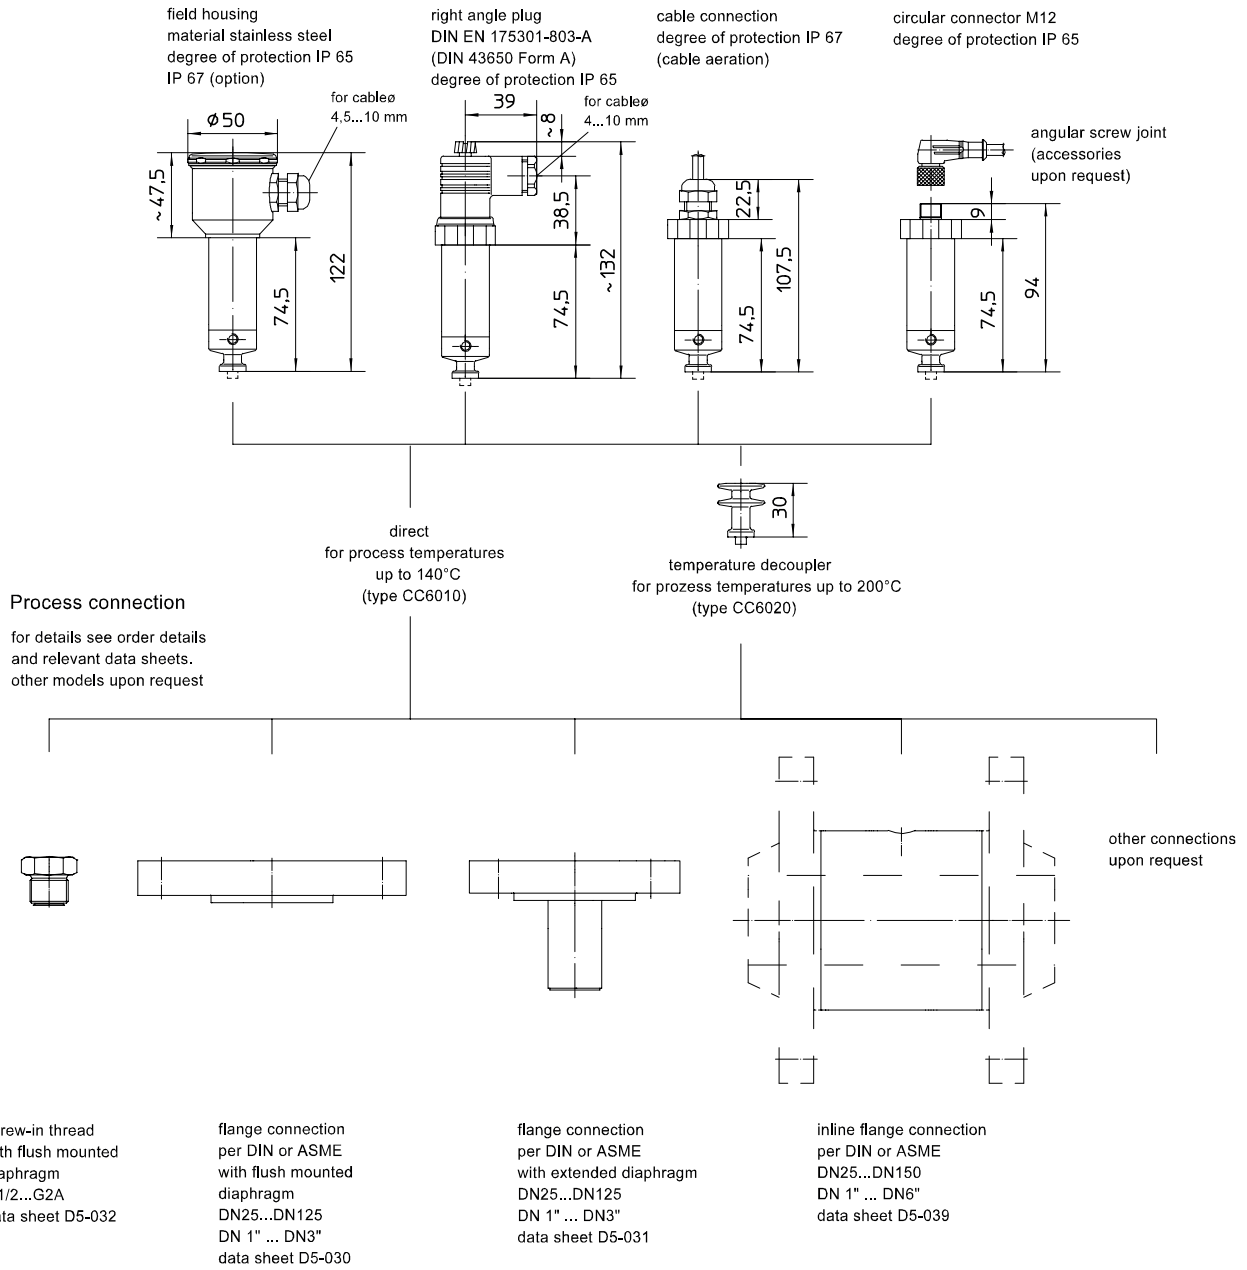


Connection diagram

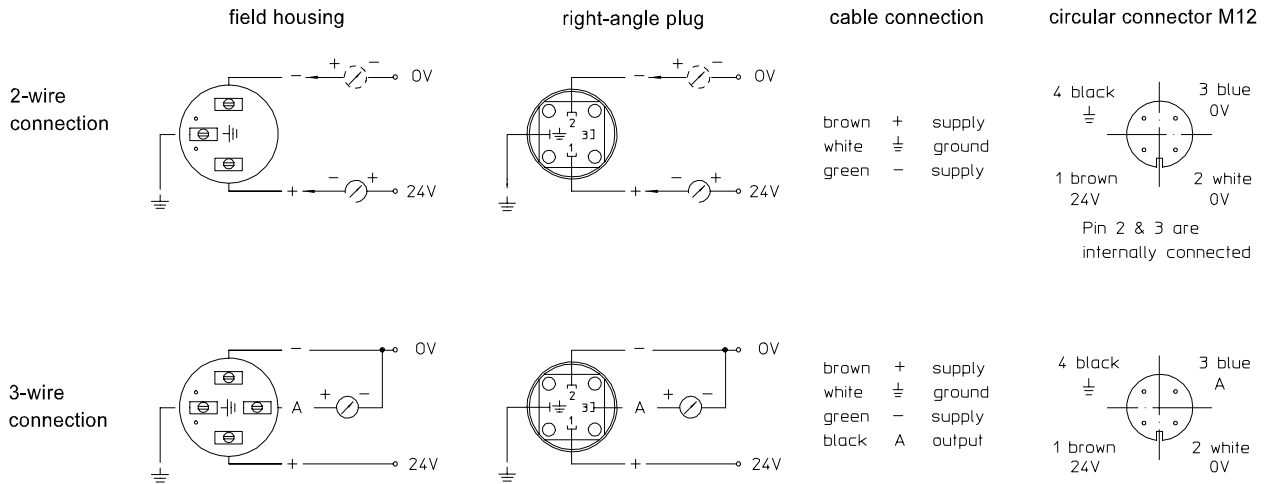

Standard position of el. connections.
Pls. specify different position.

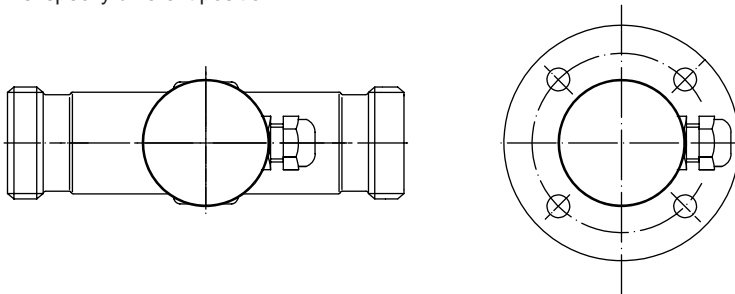

Order details

Pressure transmitter COMPACT for diaphragm seal operation, robust						
design	· for process temperature to + 140 °C ¹				CC601.	
	· for process temperature to + 200 °C				CC602.	
Ex protection	· without				0	
	·  II 2G EEx ib IIC T6				1	
measuring range	meas. range	overload limit (bar)	sensor type			
	0...250 mbar ²	1	piezoresistive		A1010	
	0...400 mbar	3			A1011	
	0...0,6 bar	3			A1052	
	0...1 bar	3			A1053	
	0...1.6 bar	10			A1054	
	0...2.5 bar	10			A1055	
	0...4 bar	20			A1056	
	0...6 bar	60			A1057	
	0...10 bar	60			A1058	
	0...16 bar	60			A1059	
	0...25 bar	60			A1060	
	0...40 bar	100			A1061	
	0...60 bar	200			A1062	
	0...100 bar	200			A1063	
	0...160 bar	600			thin film	
	0...250 bar	600	A3065			
	0...400 bar	600	A3066			
	0...600 bar ^{1,3}	900	A3068			
	0...1050 bar ^{1,3}	1050	A3620			
	0...1050 bar ^{1,3}	1050	A3620			
	-250...0 mbar ²	1	piezoresistive		A1027	
	-400...0 mbar ²	3			A1028	
	-0,6...0 bar ⁴	3			A1085	
	-1...0 bar ⁴	3			A1086	
	-1...0.6 bar ⁴	10			A1087	
	-1...1.5 bar ⁴	10			A1088	
	-1...3 bar ⁴	20			A1089	
	-1...5 bar ⁴	20			A1090	
	-1...9 bar ⁴	60			A1091	
	-1...15 bar ⁴	60			A1092	
	0...1 bar abs	3			B1053	
	0...1.6 bar abs	10			B1054	
	0...2.5 bar abs	10			B1055	
	0...4 bar abs	10			B1056	
	0...6 bar abs	60			B1057	
0...10 bar abs	60	B1058				
measuring range as in writing					A9999	
output signal: 4...20 mA, 2-wire technology					H1	
case electrical connections	field housing of stainless steel, with cable gland		· IP 65, measuring ranges ≤ 16 bar, only ⁵		T410	
			· IP 67		T420	
	right angle plug according to DIN EN 175301-803-A (DIN 43650 Form A), IP 65					T110
	cable connection IP 67	· 2 m cable length				T310
		· 5 m cable length				T311
		· 10 m cable length				T312
· cable length as in writing				T319		
circular connector M12, IP 65 ⁶					T120	
continued next page						

¹ measuring range ≥ 600 bar only available with type series CC6010 and with a max. medium temperature up to 85 °C

² low pressure ranges with increased temperature influence (zero point and span): max. = 0.4 %/10K

³ only available with process connection DD8050 (see data sheet D5-042-1)

⁴ negative relative pressure ranges (e.g. -1...+1 bar) are adjusted at works to 0...100%, e.g. 4...20mA.

Long-term vacuum measurements at temperatures above +50°C may cause changes in the properties of the measurement device.

Vacuum-proof designs are available upon request.

⁵ not valid for absolute pressure

⁶ plug connector with cable see product group D6 (accessories)

process connection	screw-in thread	<ul style="list-style-type: none"> · G 3/4 A · G 1 A · G 1 1/2 A · G 2 A 							DE1280 DE1380 DE1580 DE1680
	flange	sealing surface EN 1092-1 Form B1 (DIN 2526 Form C/D) sealing surface form B2 (form E), incase of special diaphragm material							DA1 ... DA2 120 ... 150 ... 420 ... 430 ... 620
		DIN	<ul style="list-style-type: none"> · DN 25, PN 10/40 · DN 25, PN 64/100 · DN 50, PN 10/40 · DN 50, PN 64 · DN 80, PN 10/40 · further DN/PN upon request 						
	ASME	sealing surface ASME B16.5 RF125 - 250 AA sealing surface ASME B16.5 RFSF, erforderlich bei Sonder-Membranmaterial							DA51 ... DA5 ... 110 120 310 320 510 520
process connection	flange with diaphragm extension (trunk type design)	sealing surface EN 1092-1 form B1 (DIN 2526 form C/D)	<ul style="list-style-type: none"> · DN 25, PN 10-40 · DN 50, PN 25-40 · DN 80, PN 10-40 · DN 100, PN 10-16 · DN 100, PN 25-40 · DN 125, PN 10-16 · DN 125, PN 25-40 						DB1120 DB1420 DB1620 DB1710 DB1720 DB1810 DB1820
		sealing surface ASME B16.5 RFSF	<ul style="list-style-type: none"> · DN 1", PN 300 psi · DN 2", PN 300 psi · DN 3", PN 150 psi · DN 3", PN 300 psi · DN 4", PN 150 psi · DN 4", PN 300 psi 						DB5120 DB5320 DB5510 DB5520 DB5610 DB5620
	inline diaphragm seal (cell type)	EN 1092-1 with plain sealing surface, form B2	<ul style="list-style-type: none"> · DN 25 · DN 40 · DN 50 · DN 65 · DN 80 · DN 100 · DN 125 · DN 150 · weitere Nennweiten und Druckstufen auf Anfrage 						DP2180 DP2380 DP2480 DP2580 DP2680 DP2780 DP2880 DP2980
		ASME with plain sealing surface ASME B16.5 RF500 RFSF	<ul style="list-style-type: none"> · DN 1" · DN 1 1/2" · DN 2" · DN 2 1/2" · DN 3" · DN 4" · DN 5" · DN 6" · weitere Nennweiten und Druckstufen auf Anfrage 						DP6180 DP6280 DP6380 DP6480 DP6580 DP6680 DP6780 DP6880
wetted parts ¹	<ul style="list-style-type: none"> · stainless steel material no. 1.4404/1.4435 (316 L) · stainless steel material no. 1.4435 (316 L) · Tantalum · Hastelloy C276 · other materials upon request 								A4001 A4007 A4002 A4003 A4009
system filling ³	<u>liquid filling</u> <ul style="list-style-type: none"> · foodstuff oil FD1, standard · foodstuff oil FD1, pls. specify temperature, max. other liquids upon request 	<u>operating temperature range</u> <ul style="list-style-type: none"> -10...+140 °C -10...+200 °C 							L22 L23
immersion ⁴ length L	<ul style="list-style-type: none"> · 60 mm standard at ≥ DN 80 (3") · 100 mm standard at ≤ DN 65 (2 1/2") 								F1 F2
length of trunk ² material no. 1.4571 (316 Ti)	<ul style="list-style-type: none"> · h = 50 mm · h = 100 mm · h = 150 mm · h = 200 mm · h (mm): special length 								F1 F2 F3 F4 F9
additional features upon request (to be indicate in case of need, only)									
ambient temperature -40...85 °C ⁵									U11
materials certificate acc. to EN 10204-3.1, wetted parts (stainless steel)									W1020
functional safety per EN 61508, classification per SIL2									W2602
as per UKCA regulations									W2660
diaphragm seal electropolished									W4035
example:	pressure transmitter	CC6011	A1058	H1	T410				DA1420 A4001 L22
	process connection								

¹ standard stainless steel mat. no. 1.4404 (316L), special material upon request

² to be specified for flange with trunk-type design, only

³ for ideal system design the exact operating temperature should be specified

⁴ for inline diaphragm seal (cell type), only

⁵ not for Ex design and not in combination with SIL2